


WHAT YOU NEED TO KNOW

Selecting and installing the right cable is simple, just follow these five easy steps:

1. Measure roof overhang and select corresponding factor.
2. Measure length of roof to be protected and multiply by factor to obtain length of cable required for the roof.
3. Measure length of gutter (if any).
4. Measure length of cable to go around dormers (if any).
5. Measure length of downspouts. Multiply by 2 if double cable is used in downspout.

OVERHANG	FACTOR
0"	1.5
12"	2.3
24"	3.2
36"	4.2
48"	5.1

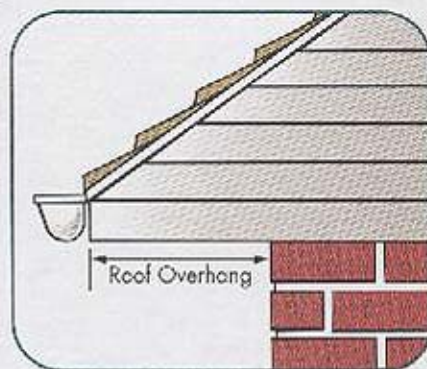

Total length of cable required is sum of 2, 3, 4 and 5. Select from the standard lengths to meet your needs.

